

Description:

6 Mil Polyethylene Vapor Barrier, seams taped, Rubber Neo-shok Pads, stapled to bottom layer, 2 Layers of 4 ply Douglas Fir, glued & stapled, Moistop Vapor Barrier, under flooring 3/4" X 2 1/4" Solid Hard Rock Maple Flooring

Features & Benefits:


- **Quality Materials, no need to replace in 10-20 years**
 - **Superior Craftsmanship, built sturdy, won't fall apart**
 - **All Inclusive Easy to Understand Pricing, simple, less hassles, no nickel and diming**
 - **Lifetime Limited Warranty, no out of pocket repair bills because of faulty materials or workmanship***
 (Backed with Over 60 Years Experience)
- *does not cover moisture, maintenance or water related problems




Specifications:

SYSTEM TYPE	Floating System	SLAB DEPRESSION	25/32" (20 mm) flooring - 2 1/2" (64 mm) 33/32" (26 mm) flooring - 2 3/4" (70 mm)
FLOORING TYPE	Hard Rock Maple or customer choice	TESTING LABORATORY	United States Sports Surfacing Laboratory
ANCHORAGE	No concrete attachment	CERTIFIED TESTING	Laboratory test equipment
SUBFLOOR CONSTRUCTION	Plywood Panel	GREEN STATUS	Managed forests, certification available calibrated and certified through the ISSS
RESILIENCE	PVC Pads		


WALL BASE DETAIL

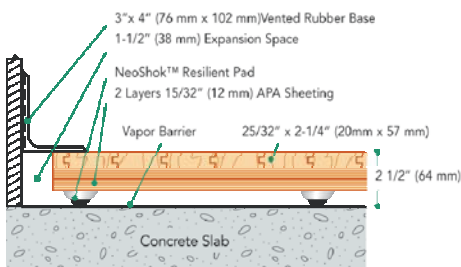

THRESHOLD DETAIL (optional accessory)

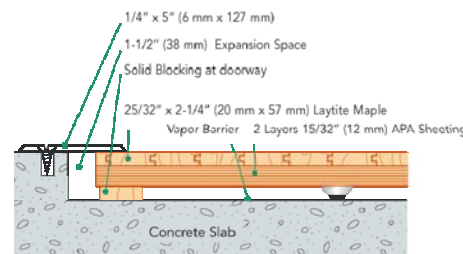

EQUIPMENT DETAIL (optional accessory)

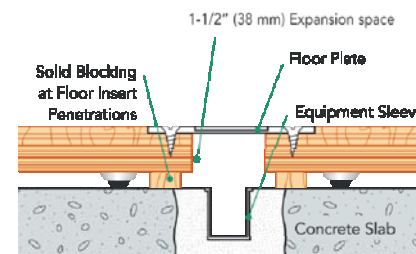

Tacinelli Sports Floor Systems
 P.O. Box 117, Billings, NY 12510
 1-888-404-WOOD
 cdtacinelli@tacinelli.com
 www.bestsportsfloors.com